




Huaxin Bearing Co., Ltd

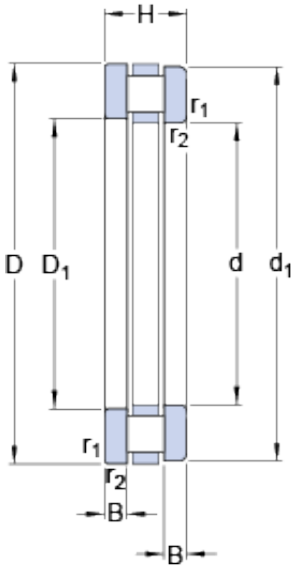

81240 M Bearing 2D drawings and 3D CAD models

200 mm x 280 mm x 18 mm SKF 81240 M thrust roller bearings

Bearing No. 81240 M

| | |
|---|---------------|
| Size | 280x200x62 mm |
| Bore Diameter | 280 mm |
| Outer Diameter | 200 mm |
| Width | 62 mm |
| d | 200 mm |
| D | 280 mm |
| H | 62 mm |
| d ₁ | 277 mm |
| D ₁ | 204 mm |
| B | 18 mm |
| r _{1,2} - min. | 2 mm |
| d _a - min. | 275 mm |
| D _a - max. | 210 mm |
| r _a - max. | 2 mm |
| Basic dynamic load rating - C | 720 kN |
| Basic static load rating - C ₀ | 3100 kN |
| Fatigue load limit - P _u | 255 kN |
| Reference speed | 500 r/min |
| Limiting speed | 1000 r/min |
| Mass bearing | 13.55 kg |
| Category | Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| | |



Huaxin Bearing Co., Ltd

| | |
|--------------------------------|----------|
| UNSPSC | 31171547 |
| Weight / Kilogram | 0 |
| Product Group | B04144 |
| d_1 | 277 mm |
| D_1 | 204 mm |
| $r_{1,2}$ min. | 2 mm |
| d_a min. | 275 mm |
| D_a max. | 210 mm |
| r_a max. | 2 mm |
| Basic dynamic load rating C | 720 kN |
| Basic static load rating C_0 | 3100 kN |
| Fatigue load limit P_u | 255 kN |
| Minimum axial load factor A | 0.769 |